


T90 Series Uncooled Multimode Wavelength Stabilized Laser Diode Module

TY-T90W-878.6+/-01NM-090.0W-25C-0.22NA

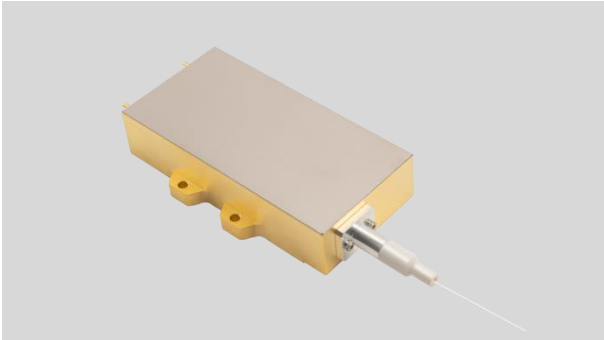

SkyEra delivers TY-T90W-878.6+/-01NM-090.0W-25C-0.22NA diode lasers employing professional coupling technology, that enjoy multiple advantages, e.g., compact design, stable output power, high power, high efficiency and convenient packaging. These laser diode modules can provide solutions for fiber laser applications and direct suppliers.

The performance and aging tests have been performed upon the production line to guarantee reliable, stable and long lifetime of products. To provide customers with high-quality, high-cost performance products is the company's goal.

Specification:

Functional parameters are tested on condition that the heat sink temperature is 25 degree, contact resistance of the component and the heat sink is smaller than 1CM² K/W.

Parameter	Min	Typ	Max	Unit	Conditions
Output Power	90	90	-	W	
Centre Wavelength T90W	- 877.6	- 878.6	- 879.6	nm	
Spectral Width (FWHM)	-	0.8	1.0	nm	0.5nm DPI
Threshold Current	-	1.2	1.8	A	
Operating Current	-	12.0	14.0	A	
Operating Voltage	-	14.5	15.5	V	
Convention Efficiency	-	50	-	%	
95% Power	-	0.18	-	NA	
Wavelength shift vs. Temperature	-	0.35	-	nm/°C	
Slop Efficiency	-	8.0	-	W/A	
Storage Temperature	-30	25	70	°C	Non-Condensing
Operating Temperature	20	25	30	°C	
Fiber Bend Radius	50	-	-	mm	
Core Diameter	-	200	-	µm	
ISO	-	30	-	dB	1050-1150nm
Numeric Aperture	0.2	0.22	0.24	-	
Fiber length	0.9	1.5	-	M	
Protection Tube	0.9	-	1.5	mm	
Fiber Connector	-	SMA905	-	-	

Key Parameters:

- Based on single fire spot laser module
- High output power 90W
- High stability
- 0.22NA 200µm core multimode fiber
- Parallel weld 2-Pin sealed package
- Standard central wavelength 878.6nm
- Narrow linewidth
- RoHS compliance

Application:

- Medical
- Printing
- Pump source
- Material processing

