

## 885nm 120W Uncooled Multimode Wavelength Stabilized Laser Diode Module

TY-885+/-01NM-120.0W-25C-200-0.22NA-T120



SkyEra delivers TY-885+/-01NM-120.0W-25C-200-0.22NA-T120 diode lasers employing professional coupling technology, that enjoy multiple advantages, e.g., compact design, stable output power, high power, high efficiency and convenient packaging. These laser diode modules can provide solutions for fiber laser applications and direct suppliers.

The performance and aging tests have been performed upon the production line to guarantee reliable, stable and long lifetime of products.

To provide customers with high-quality, high-cost performance products is the company's goal.

### Specification:

Functional parameters are tested on condition that the heat sink temperature is 25 degree, contact resistance of the component and the heat sink is smaller than 1CM<sup>2</sup> K/W.

### Key Parameters:

- Based on single fire spot laser module
- High output power 120W
- High stability
- 0.22NA 200µm core multimode fiber
- Parallel weld 2-Pin sealed package
- Standard central wavelength 885nm
- Narrow linewidth
- RoHS compliance


### Application:

- Medical
- Lighting
- Pump source

Parameter	Min	Typ	Max	Unit	Conditions
Output Power (CW)	120		-	W	
Centre Wavelength	884	885	886	nm	HR@ 1050-1150>25dB, HR@ 1060-1100>30dB
Spectral Width (FWHM)	-	0.8	1.0	nm	0.5nm DPI
Threshold Current	-	0.7	2.0	A	
Operating Current	-	13.0	14.0	A	
Operating Voltage	-	23.5	25.0	V	
Convention Efficiency	-	40	-	%	
95% Power	-	0.18	-	NA	
Wavelength shift vs. Temperature	-	0.02	-	nm/°C	
Slop Efficiency	-	9.0	-	W/A	
Storage Temperature	-30	25	70	°C	Non-Condensing
Operating Temperature	20	25	30	°C	
Fiber Bend Radius	50.0	-	-	mm	
Buffer Diameter	-	320	-	µm	
Cladding Diameter	-	220	-	µm	
Core Diameter	197	200	203	µm	
Numeric Aperture	0.2	0.22	0.24	-	
Fiber length	0.9	-	-	M	
Protection Tube	0.9	-	1.5	mm	
Fiber Connector	-	CO	-	-	

## 2. Dimension Diagram

Unit:MM; undeclared tolerance:  $\pm 0.5\text{mm}$ ;

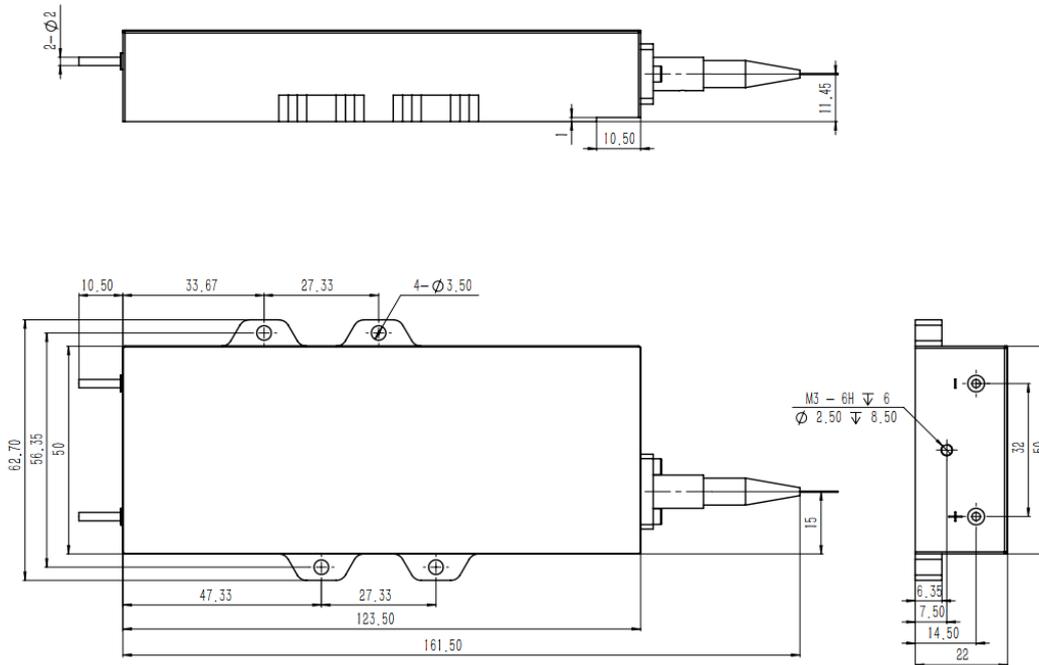

## 3. Instructions

- Avoid eyes or skin exposure to direct or scattered radiation;
- ESD protection is required for transportation, storage and operation; short-circuit protection between pins is required for transportation and storage.
- Please connect pins by solder when operating current is over 6A; solder point should be close to the root of pins with a max soldering temperature at  $260^{\circ}\text{C}$  and a duration less than 10 seconds ;
- Drive constant current power supply by laser and avoid surge while working;
- Operate under rated current and rated power;
- Good heat dissipation is required;
- Please test with coated fiber in order to avoid chip damage by reducing back reflection;
- Operating temperature is  $20 \sim 30^{\circ}\text{C}$ ;
- Storage temperature is  $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$ .

