


760nm 2W COS AuSn bonding Laser Diode Module

TY-760±10nm-2.0W-25C-COS-150

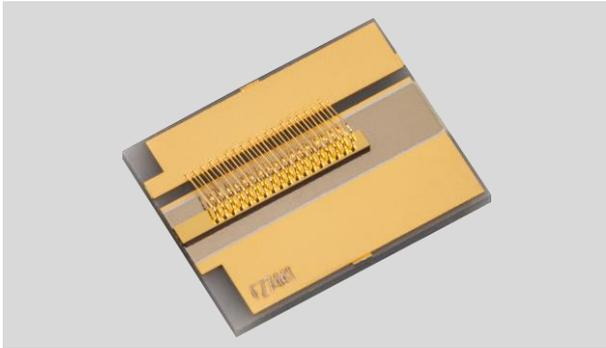

SkyEra delivers T Y-760±10nm-2.0W-25C-COS-150 chip on submount diode lasers, employing AuSn bonding and P Down package with multiple advantages of high reliability, stable output power, high power, high efficiency, long lifetime and high compatibility, and are widely applied in the market.

The performance and aging tests have been performed upon the production line to ensure reliable, stable and long lifetime of products.

To provide customers with high-quality, high cost performance products is the company's goal.

Specification:

Functional parameters are tested at the temperature of the heat sink is 25 degree, contact resistance of the component and heat sink is less than 1 CM2 K/W. Reduced lifetime if used above nominal operating conditions. A non-condensing environment is required for storage and operation below the ambient dew point.

Parameters	Min	Typ	Max	Unit	Conditions
Output Power	-	2	-	W	
Center Wavelength	750	760	770	nm	
Spectral Width(FWHM)	-	3.5	-	nm	
Spectral Width(90%)	-	6	-	nm	
Fast-Axis Divergence	-	62	-	°	Collimating
Fast-Axis Divergence(FWHM)	-	30	-	°	
Slow-Axis Divergence	-	11	-	°	
Slow-Axis Divergence(FWHM)	-	10	-	°	
Polarization Mode	-	TE	-	-	
Wavelength Tuning vs. Temperature	-	0.3	-	nm/°C	
Emitter Size	-	150	-	µm	
Threshold Current	-	0.5	-	A	
Operating Current	-	2.2	2.5	A	
Operating Voltage	-	1.83	2.2	V	
Power Conversion Efficiency	-	50	-	%	
Slop Efficiency	-	1.1	-	W/A	
Storage Temperature	0	-	80	°C	
Operating Temperature	15	-	55	°C	
Apparent Size	4.5x5.75x0.5			mm	

Features:


- Chip on submount design
- P Down sealed package
- High stability
- Long lifetime
- High reliability
- AuSn bonding
- RoHS compliance

Application:

- Medical
- Printing
- Industry
- Pumping

2. Package Dimension

Unit: MM

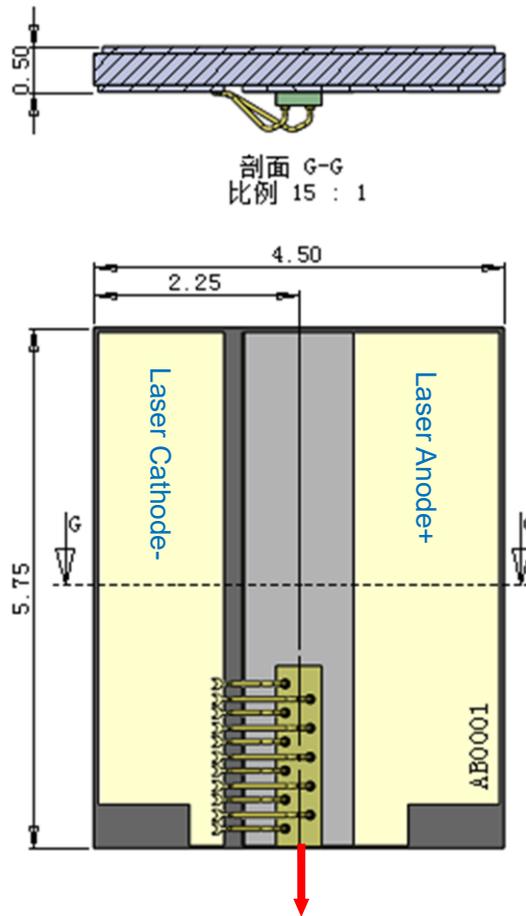

3. Instructions

- Avoid eyes or skin exposure to direct or scattered radiation;
- ESD protection is required for transportation, storage and operation;
- Max soldering temperature is 260°C;
- Drive constant current power supply by laser and avoid surge while working;
- Operate under rated current and rated power;
- Good heat dissipation is required;
- Operating temperature is 15°C~55°C;
- Storage temperature is 0°C~+80°C.

